

CI/SfB | (31.59) | Xt7 |



CODELOCKS
control + convenience

Our passion for quality
and service means we
are the only brand in
our market sector
which offers:

The Complete Package

We provide everything in the box to fit the lock to the door – parts, instructions, templates – everything except the tools.

The Codelocks Guarantee

Mechanical Locks – Codelocks offer a limited lifetime guarantee, any of our Mechanical Locks will be repaired, service or replaced free of charge if they develop a manufacturing fault*.

Electronic Locks – Codelocks offer a 2 year guarantee on all Electronic Locks*.

Simply call us, or email details of the problem, and we will do the rest.

Always In Stock

We carry a full inventory of all our products and spare parts.

Quality Manufacture: ISO 9001:2008

Certificate CN10/31435



*Faults caused by misuse, abuse and/or poor fitting are not covered by the guarantees.



Codelocks Electronic Range

Codelocks electronic locks are multi-code, multifunction, programmable products for a variety of applications, from cabinets and lockers to high traffic doors.



Cabinet Lock CL1000 Electronic



Colour Options Available



Codelock CL1200 Electronic



Codelock CL2000 Electronic



Codelock CL4000 Electronic



Codelock CL5000 Electronic

Codelocks Complete Range	2	Mechanical Locks	18
Electronic Locks	4	CL100 Entry level locks	20
CL1000 Cabinet Lock	6	CL200 Premium quality, light duty locks	22
CL1200 Cabinet Lock	8	CL400 Premium quality, medium duty locks with lever handles	24
CL2000 Light duty	10	CL0460 Narrow Stile Codelock	26
CL4000 Medium duty with lever handles	12	CL500 Premium quality, heavy duty locks with lever handles	28
CL4000GD Glass Door Lock	14	CL600 Premium quality, heavy duty locks with lever handles	30
CL5000 Heavy duty with lever handles	16	Technical Specifications	32

Codelocks Mechanical Range

Mechanical Codelocks are easy to install products with a number of options for a variety of applications. Where a single easily changed code is required mechanical locks are an ideal access control solution.



Codelock CL100 Mechanical



Codelock CL200 Mechanical



Codelock CL400 Mechanical



Codelock CL0460 Mechanical



Codelock CL500 Mechanical



Codelock CL600 Mechanical



Codelocks continue to research and develop lock technologies bringing new products to the range. Visit the Codelocks website to view our complete range of products:

www.codelocks.com

Codelocks Electronic Range

The Codelocks Electronic Range provides major benefits over mechanical locks. With rapid programming at the keypad giving multiple codes, one-time user codes, auto alarm release and remote release options.

Not requiring external power supplies, the electronic range provides a quick and cost effective access control solution for a wide range of applications, from lockers and cabinets to the primary lock on a range of doors.

Typical features include:

Door Locks

- Allows up to 80 User Codes, 4,5 or 6 digits long
- Over 1,000,000 code combinations available
- On door programming and code change via Master Code
- Allow up to 10 one-time User Codes
- Locked / unlocked LED indicator option
- PVD weather resistant finish
- Up to 200,000 operations
- Key override
- Code free mode
- Remote release options

Cabinet Locks

- Rapid retrofit
- Up to 50,000 operations
- Battery override feature
- Single User Code
- Single Master and Sub-Master Codes
- Locker Mode / single code options



Codelocks Cabinet Lock CL1000

For Cupboards, Cabinets and Lockers

The Cabinet Lock has been designed as a cost effective, easy and quick retrofit for cam locks supplied as standard on a wide range of lockers, cabinets and cupboards. It can just as easily be fitted to lockers or cabinets, which don't have a locking device already fitted, giving the user immediate, simple, keypad access without the hassle of keys!

Fitting could not be easier, simply remove existing cam lock, drill a 6mm (1/4") hole for the upper fixing bolt, position the lock on the door and secure with the fixing nut and upper bolt. Select and fit the appropriate cam, job done!

The Cabinet Lock can also be fitted to cupboards or similar enclosures that do not have a cam fitted by simply drilling the upper fixing hole and 16mm (5/8") hole for the spindle, giving immediate access control.

- 10-button keypad
- User Codes are 4 digits long
- Master and Sub-Master Codes are 8 digits long
- Repeat code mode
- Single use code mode (locker mode)
- 15,000 openings from 2 x AAA cells (supplied)
- Easy to fit in a matter of minutes
- All parts/fixings/template included
- Quick retrofit for cam locks
- Fit to units that do not have an existing lock
- Easy programming and code change
- IP 54 Rated when used in conjunction with CL1000 door gasket – available separately
- CL1000 is also available in horizontal right hand and left hand models
- Battery failure override
- Colour options available



CL1000LH
Left hand




CL1000RH
Right hand



Technical information on page 36

**CABINET
LOCK 1000
ELECTRONIC**

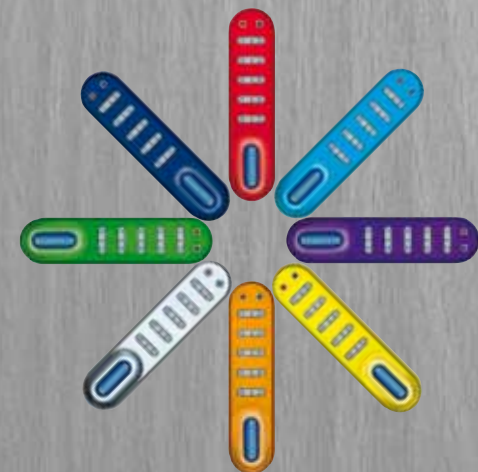

**Colour Options Available
Contact Codelocks**

Codelocks Cabinet Lock CL1200

For Cupboards, Cabinets and Lockers

The CL1200 Cabinet Lock is ideal for controlled use on leisure centre lockers, medical carts, individual cupboards, key cabinets etc. The CL1200 can handle tougher environments and heavy use.

- 10 individual stainless steel buttons
- 50,000 operations from 2 x AAA cells (supplied)
- 2 independent fixing points
- Auto unlock program
- Audible key pad
- Supplied with a selection of spindle adaptors allowing installation to various thicknesses of cabinet
- User Codes are 4 digits long
- Master and Sub-Master Codes are 8 digits long
- Repeat code mode
- Single use code mode (Locker Mode)
- Battery failure override
- Colour options available

Colour Options Available - Contact Codelocks



Technical information on page 38



Codelocks CL2000 Range

CL2000 electronic lock provides multifunction access control for situations that do not justify a full size lever lock. The lock is easily fitted as a new installation or as a rapid retrofit when upgrading from basic single code mechanical locks.

Programme commands include:

- Set new User Code
 - Suspend and restore individual User Codes
 - Suspend, restore and delete all User Codes
 - Set one-time User Codes
 - Set and cancel Code Free mode
 - Change Master Code
 - Set or change Sub-Master Code
-
- Rapid Retrofit for basic single code mechanical codelocks
 - On door programming via Master Codes in seconds
 - Allows up to 80 User Codes, 4, 5 or 6 digits long
 - Allows up to 10 one-time User Codes to be entered
 - Key override as standard
 - Over 80,000 operations from 2 x AA cells (supplied)
 - Can be fitted to square follower latch using adaptor
 - Locked ● /unlocked ●, LED Indicator option
 - Non handed
 - PVD weather resistant, low maintenance finish

CL2000

The front plate is common to all functions



CL2255 Mortice Latch
(front view)




CL2255 Mortice Latch
(inside view)



CL2200 Surface Deadbolt
(inside view)



CL2210 Mortice Deadbolt
(inside view)

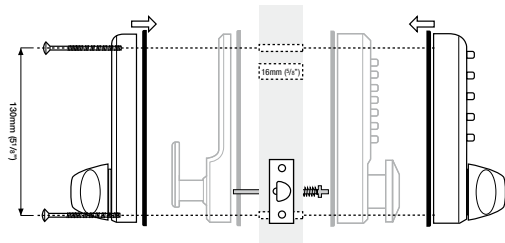

Rapid Retrofit

The CL2000 range has been designed with retrofit in mind. With the same fixing holes as the majority of basic mechanical digital locks, access control can be upgraded in a matter of minutes.

- Step 1 Remove existing mechanical digital lock
- Step 2 Drill single 16mm (5/8") hole for cable
- Step 3 Fit CL2000 on door using existing fixings

Retrofit completed!

Technical information on page 40

CODELOCK
2000
ELECTRONIC



Codelocks CL4000 Range

CL4000 is a medium duty electronic Codelock offering all the functions of the CL2000, but with the benefit of full size lever handles which allows it to be used as the primary lock on doors.

Programme commands include:

- Set new User Code
 - Suspend and restore individual User Codes
 - Suspend, restore and delete all User Codes
 - Set one-time User Codes
 - Set and cancel Code Free mode
 - Change Master Code
 - Set or change Sub-Master Code
-
- Allows up to 80 User Codes 4, 5 or 6 digits long
 - On door programming via Master Codes
 - Allows up to 10 one-time User Codes to be entered
 - Locked ● /unlocked ● LED Indicator option
 - PVD weather resistant, low maintenance finish
 - Over 200,000 operations from 4 x AA cells (supplied)
 - Tamper alarm and low battery warning
 - Connections for remote release by reception desk button, and alarm release included
 - Code Free entry mechanically by key or electronically from the keypad
 - Front change cylinder
 - Can be supplied with Master Key Option – Contact Codelocks

CL4000

The front plate is common to all functions



CL4020 Mortice Lock with Key Override
Code lockout by deadbolt operation and safety feature to prevent accidental lock-ins



CL4010 Mortice Latch
(front view)



CL4010K Mortice Latch with Knob
The CL4010 is also available with a knob option



CL4010 Mortice Latch
(inside view)

Technical information on page 42

CODELOCK
4000
ELECTRONIC




Codelocks CL4000GD Range

The CL4000GD is a medium duty electronic patch door lock offering all the functions of the CL4000. Suitable for inswing glass doors. The lock fits existing 'Rondo' type glass door prep.


Programme commands include:

- Set new User Code
 - Suspend and restore individual User Codes
 - Suspend, restore and delete all User Codes
 - Set one-time User Codes
 - Set and cancel Code Free mode
 - Change Master Code
 - Set or change Sub-Master Code
-
- Allows up to 80 User Codes 4, 5 or 6 digits long
 - On door programming via Master Codes
 - Allows up to 10 one-time User Codes to be entered
 - Locked ● /unlocked ●, LED Indicator option
 - PVD low maintenance finish
 - Over 140,000 operations from 4 x 'N' cells (supplied)
 - Code free entry mechanically by key or electronically by keypad
 - Tamper time out feature plus low battery warning
 - Lever handle supplied as either right hand (RH) or left hand (LH) versions

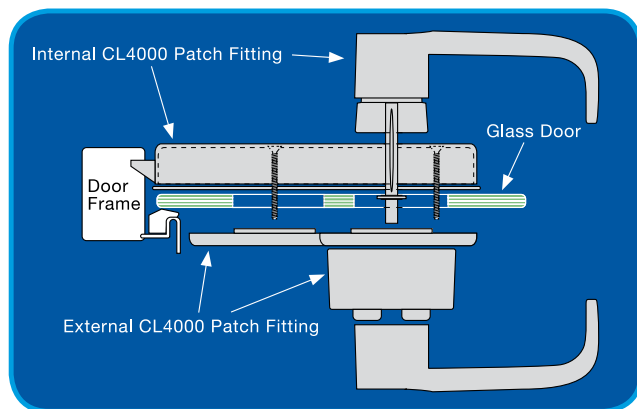

CL4000GD Patch Door Lock
(Installation view)

CODELOCK
4000
ELECTRONIC

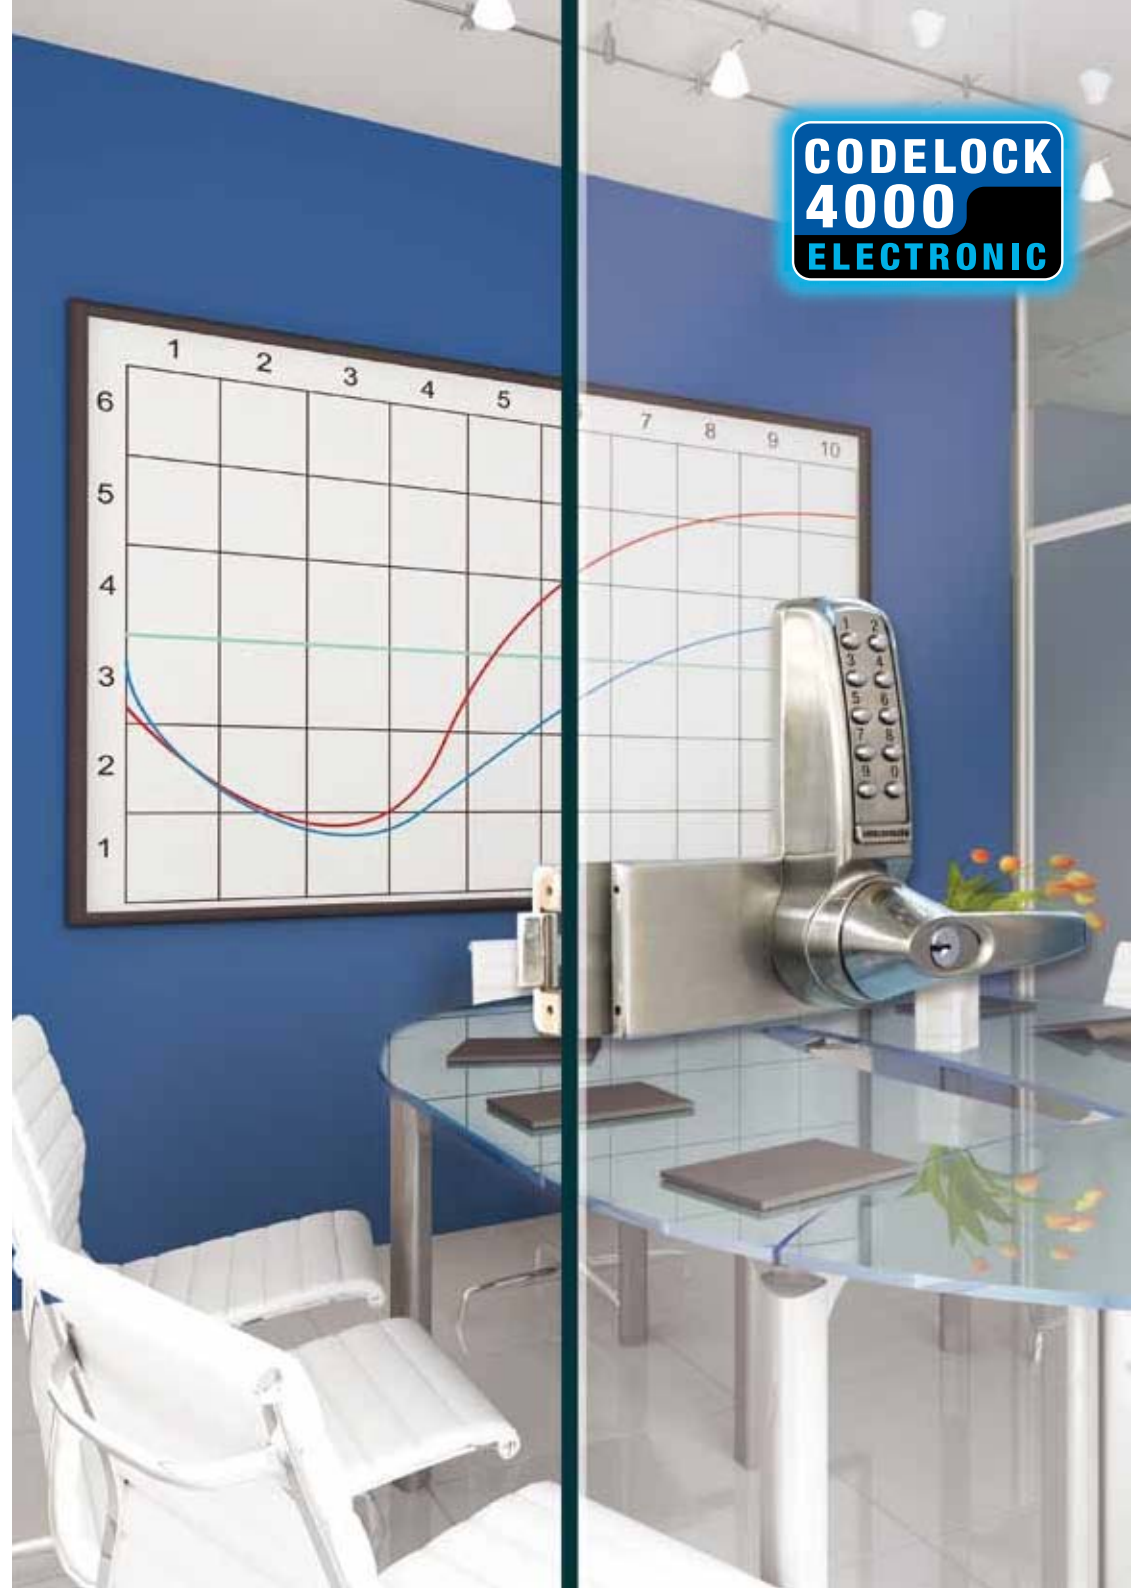

Codelocks CL5000 Range



CL5000 is a heavy duty electronic Codelock with full size lever handles for use in high traffic applications. The stylish, contemporary design incorporates all the features of the CL2000 and CL4000 in a larger, more robust assembly.

Programme commands include:

- Set new User Code
 - Suspend and restore individual User Codes
 - Suspend, restore and delete all User Codes
 - Set one-time User Codes
 - Set and cancel Code Free mode
 - Change Master Code
 - Set or change Sub-Master Code
-
- Allows up to 80 User Codes 4, 5 or 6 digits long
 - On door programming via Master Codes
 - Allows up to 10 one-time User Codes to be entered
 - Locked ● /unlocked ●, LED Indicator option
 - PVD weather resistant, low maintenance finish
 - Over 200,000 operations from 4 x AA cells (supplied)
 - Tamper alarm and low battery warning
 - Connections for remote release by reception desk button, and alarm release included
 - Code Free entry mechanically by key or electronically from the keypad
 - Front change cylinder
 - Can be supplied with Master Key Option – Contact Codelocks
 - Tested to Grade 2 ANSI A156.2 / A156.25
 - UL/ULC Fire Rating 3 hours (when fitted with fire kit)

CL5000

The front plate is common to all functions



CL5020 Mortice Lock with Key Override
Code lockout by deadbolt operation and safety feature to prevent accidental lock-ins




CL5010 Mortice Latch
(front view)



CL5010BB Back to Back
(inside view)



CL5010 Mortice Latch
(inside view)



CL5000PK Panic Kit

Technical information on page 46

CODELOCK
5000
ELECTRONIC



Codelocks Mechanical Range

The Codelocks Mechanical Range starts with light duty locks with a comprehensive range of functions through to heavy duty locks suitable as the primary lock on most doors. Mechanical locks have a single code that can be changed prior to installation or by removing the lock from the door.*

Typical features include:

- Single code
- Typically over 8,000 usable code combinations
- Code change off door*
- Easy fit
- Code free option available
- Available in knob or lever handle
- PVD weather resistant, low maintenance finish

*CL600 range allows for on door code change



Codelocks CL100 Range

This entry level lock provides a comprehensive range of functions for light duty entry control, for inner office doors, storage rooms or cupboards in commercial premises, sheds, garage-to-house doors or cupboards at home.

Available in 4 functions to suit a wide variety of applications, and in 2 finishes, the CL100 locks offer excellent value for money. Delivered with random, unrecorded codes, simply change the code by following the clear instructions provided. Installation couldn't be simpler either – just drill one hole for the spindle, two holes for the fixing bolts and one extra if a mortice latch is required.

- Simple convenient control
- Easy to fit
- Available in 4 functions
- Choice of 3 sizes of latch
- Code changes in minutes
- Our best value Codelock
- Tumbler alignment for easy code change
- Dual backplate allows option of hold open or non hold open function (CL155)

CL100

Front plate is common to all functions



CL100 Surface Deadbolt
Silver Grey finish only



CL155 Mortice Latch
With Dual backplate



CL190 Back to Back Mortice Latch
Silver Grey finish only

Upgrade to Electronic
Version see page 10

Technical information on page 50

CODELOCK
100
MECHANICAL



Codelocks CL200 Range

This premium range of light duty locks offers 5 functions in 2 PVD finishes, all of which are available with key override as an option. Multiple locks can be supplied keyed alike.

Codelock CL200 is suitable for a wide range of light duty entry control applications, in offices, warehouses, laboratories and around the home.

All products feature a bevelled hexagonal handle, tumbler alignment for easy code changing, and durable PVD (Physical Vapour Deposition) finishes. As with all Codelocks, installation and code changing are simple, thanks to the easy to follow, clear instructions supplied.

- PVD weather resistant, low maintenance finish
- Available in 5 functions
- Easy to fit
- Hexagonal bevelled handle and lock case
- Tumbler alignment for easy code change
- Key bypass option may be specified on any function
- Dual backplate allows option of hold open or non hold open function (CL255)

CL200

Front plate is common to all functions



Key Override option is available on all functions
Stainless Steel finish only



CL200 Surface Deadbolt



CL210 Mortice Deadbolt



CL255 Mortice Latch
With Dual backplate



CL290 Back to Back
Stainless Steel finish only
Note – optional key, one side only

Upgrade to Electronic Version see page 10

Technical information on page 52

CODELOCK
200
MECHANICAL



Codelocks CL400 Range

This is a medium duty range with full size lever handles, allowing use as the primary lock on doors where a knob-operated lock would be unsuitable.

The functions available allow for various ways of managing entry by code, by key and by Code Free operation of the lever handle on the CL405, CL415 and CL425 models.

Throwing the deadbolt of the CL420/425 models will lock out the code users when appropriate. A safety feature ensures that the inside lever handle will retract the deadbolt so avoiding accidentally locking a person in the room.

The key can be used to retract the latchbolt and so may be issued for cleaning and security staff use.

Codelock CL400 can also be supplied as front and back plates only, for use with customers' own installed mortice locks, making it an ideal economic solution for high traffic door control in health, educational and other institutional premises.

- Medium duty Codelock
- PVD weather resistant, low maintenance finish
- Full size lever handles
- Outside lever has a slipping clutch to avoid damage to the mechanism if forced
- Easy code change as often as required
- Code Free option available
- Mortice lock and mortice latch functions

CL400

Front plate is common to all functions



CL420 Mortice Lock
With safety feature
CL425 Mortice Lock
With safety feature and
Code Free entry option

CL400 Plates Only

Utilising existing door lock or latch

CL405 plates only

As CL400 with Code Free entry option



CL410 Mortice Latch
(inside view)
CL415 Mortice Latch
With Code Free entry option



CL410BB Mortice Latch
May be specified as Back to Back
(BB) to provide coded access in
both directions

Technical information on page 54

CODELOCK
400
MECHANICAL



Codelocks CL0460 Range

Narrow Stile Codelock for Aluminium doors

The narrow stile Codelock is an affordable alternative to electronic keypads, electric strikes, magnetic locks and other systems used on aluminium framed doors. There have been limited mechanical digital lock options for this market, until now.

The narrow stile Codelock is a medium duty mechanical Codelock suitable for use with aluminium doors. The lock is ideal for new or retrofit applications. Designed to be retrofitted to Adams Rite or similar style ANSI round cylinder mortice deadlatches. As usual Codelocks have designed the product so everything required to fit the lock to the door (including cams) is in the box, making ordering and fitting very easy.

- Non handed – suitable for left or right hand hung doors, makes ordering/fitting very simple
- Full size lever handles standard, ball shape knobs available
- Easy installation
- PVD weather resistant, low maintenance finish
- Includes cams and fixing tabs
- Designed to be retrofitted to Adams Rite or similar style ANSI round cylinder mortice deadlatches – sold separately

The narrow stile mechanical Codelock provides access control in the following ways:

- By code via the keypad
- By key which can override the code and retract the latch
- The key can also be used to lock out code users Code Free operation can be selected with the CL0465 and CL0475 models



CL0460
(front view)



CL0460
(inside view)



CL0460
(side view)

Technical information on page 56

CODELOCK
0460
MECHANICAL



Codelocks CL500 Range

This is a heavy duty range with full size lever handles, allowing use as the primary lock on most doors, particularly in high traffic situations.

The functions available allow for various ways of managing entry by code, by key and by Code Free operation of the lever handle on the CL505, CL515 and CL525 models.

Throwing the deadbolt of the CL520/525 models will lock out the code users when appropriate. A safety feature ensures that the inside lever handle will retract the deadbolt so avoiding accidentally locking a person in the room. The key can be used to retract the latchbolt and so may be issued for cleaning and security staff use.

- Heavy duty Codelock
- PVD weather resistant, low maintenance finish
- Full size lever handles
- Outside lever has a slipping clutch to avoid damage to the mechanism if forced
- Easy code change as often as required
- Code Free option available
- Mortice lock and mortice latch functions
- Ball shape knob available for all versions except for CL520/525 versions

CL500
Front plate is common
to all functions



CL520 Mortice Lock
With safety feature
CL525 Mortice Lock
With safety feature and
code free entry option



CL510 Mortice Latch
CL515 Mortice Latch
with Code Free entry option



CL510BB Mortice Latch
May be specified as Back to
Back (BB) to provide coded
access in both directions
Stainless Steel finish only

CL500* Plates Only
Utilising existing door
lock or latch
CL500BB* Back to Back Plates
For use with existing door
lock or latch
Stainless Steel finish only

CL505* Plates Only
As CL500 with Code Free
entry option



CL500 Panic Kit
Coded front plate only with
extra long spindle to work with
most single point panic pads
or bars (not supplied)

* image not shown

Technical information on page 58

CODELOCK
500
MECHANICAL



Codelocks CL600 Range



The heavy duty CL600 range incorporating the new Quick Code system allows on door code change in seconds. Typically most mechanical digital locks require removal from the door or at least to be partly disassembled to change the code. Not now!

The CL600 Quick Code system brings significant advantages to commercial users such as hospitals, schools and local authorities. In fact any business that needs to be in control of coded access on multiple doors, simply and quickly.

Quick Code allows the keyholder to change the code from the front of the door. The key supplied is also able to open the door without the code if required. Locks can be supplied as keyed alike on request.

- Heavy duty Codelock
- On door code change in seconds
- Supplied non-handed
- PVD weather resistant, low maintenance finish
- Over 8000 code combinations
- Full size lever handle or ball shape knob available except for CL620/625 versions
- Front change key cylinder
- Key override standard feature
- Can be supplied with Master Key Option – Contact Codelocks
- Tested to Grade 2 ANSI A156.2
- UL/ULC Fire Rating 3 hours (when fitted with fire kit)

CL600

Front plate is common to all functions



CL620 Mortice Lock
With safety feature

CL625 Mortice Lock
With safety feature and code free entry option

CL600* Plates Only
Utilising existing door lock or latch

CL600BB* Back to Back Plates
For use with existing door lock or latch
Brushed Steel finish only

CL605* Plates Only
As CL600 with Code Free entry option

* image not shown



CL610 Mortice Latch
(inside view)

CL615 Mortice Latch
with Code Free entry option




CL610BB Mortice Latch
May be specified as Back to Back (BB) to provide coded access in both directions
Brushed Steel finish only




CL600 Panic Kit
Coded front plate only with extra long spindle to work with most single point panic pads or bars (not supplied)

How to Quick Code


Change code in 3 steps



1. Turn key fully anticlockwise



2. To select any button as part of code, turn button clockwise



3. Remove key

Quick Code completed!

Technical information on page 60



CODELOCK
600
MECHANICAL





Technical Specifications



Cabinet Lock CL1000

Technical Specifications

Power	2 x 1.5v AAA cells
Operations	15,000 openings
Low battery	The lock will signal low battery to the user via the red LED flashing. The lock will open 100 more times after this signal is initiated. The non-volatile memory retains settings when batteries are changed.

Battery failure override

The Cabinet Locks have been designed so a PP3 battery can be placed against the external contacts and using Master Code to gain entry.


External dimensions

Length 136mm (5³/₈" x width 32mm (1¹/₄" x depth 30mm (1³/₁₆" to top of handle.

Colour options

Material	Zinc Alloy
Buttons	Dual epoxy coated buttons
Cam fixing point	8mm (5/16") square
Door thickness	CL1004 - 6mm (1/4") or less CL1005 - 12mm (1/2") or less Standard CL1006 - 19mm (3/4") or less CL1007 - 25mm (1") or less
Finish	Silver Grey
IP rating	IP54 (when fitted with optional gasket)

For internal use

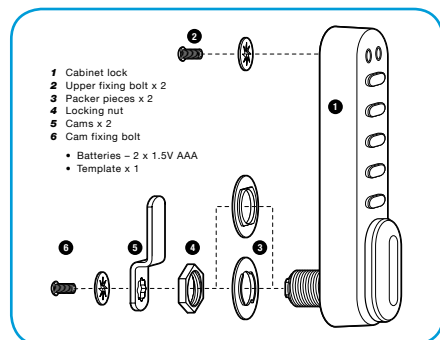

CODES

Programming Information

The Cabinet Lock has four code levels available:

- Master Code
- Sub-Master Code
- User Code
- Technician Code

The Cabinet Lock is supplied with two factory set codes:

Master Code: 11 33 55 77

User Code: 22 44

- When fitted immediately change the Master Code and User Code.
- All Master Codes and Sub-Master Codes are 8 digits long – 100,000,000 code permutations.
- All User Codes are 4 digits long – 10,000 possible code permutations.
- The lock 'open' time is set at 4 seconds.

FUNCTIONS


Before programming select the most appropriate function for the application.

A) Repeat code mode

Important Note: This is the default function and is already pre-programmed in new locks. This is the most common function and is used where the same code will be repeatedly used.

B) Single use code mode (locker mode)

The User enters a single use code which will lock and then open the lock once only and then be erased. This function is used for short term, multi occupancy applications e.g. a locker in leisure centre. The lock will now remain open until the next single use code is entered into the lock.

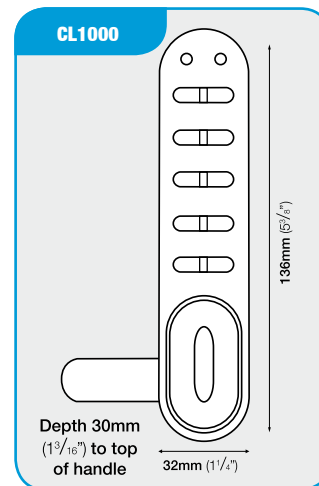

OPERATING INSTRUCTIONS

Note: The Cabinet Lock has a 10 button keypad and a #. The # is used when programming and is found behind the handle.

The lock has the following code levels:

Master Code can:

Open the lock
Change the Master Code
Set / Change / Delete the Sub-Master and User Code
Select between repeated use and single use codes
Restrict the lock time

Sub-Master Code can:


Open the lock
Change the Sub-Master
Set / Change / Delete the User Code

User Code can:

Open the lock
Change the User Code
A same code cannot be programmed into more than one level

Technician Code can:

Open the lock without erasing User Code

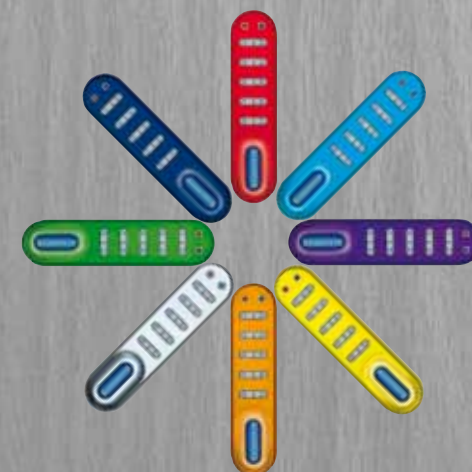

Colour Options Available
Contact Codelocks

Cabinet Lock CL1200

Technical Specifications

Power	2 x 1.5v AAA cells
Operations	50,000 openings
Low battery	The lock will signal low battery to the user via the red LED flashing. The lock will open 100 more times after this signal is initiated. The non-volatile memory retains settings when batteries are changed.

Battery failure override

The Cabinet Locks have been designed so an external PP3 battery can be placed against the external contacts and using Master Code to gain entry.

External dimensions

Length 141mm (5⁵/₈") x width 41mm (1⁵/₈") x depth 38mm (1¹/₂") to top of handle.

Material Zinc Alloy

Cam fixing point 8mm (5/16") square

Door thickness The CL1200 is supplied with 4 spindles to suit door between 6mm (1/4") or less up to 25mm (1") or less.

Buttons Individual stainless steel buttons. Audible button press.

Finish Silver Grey

Auto-unlock feature: The lock can be programmed via the Master Code to auto open after a preset time, 2, 4, 6, 8, 12 hours (locker mode only).

IP rating IP54 (when fitted with supplied gasket)

For internal use

CODES

Programming Information

The Cabinet Lock has four code levels available:

- Master Code
- Sub-Master Code
- User Code
- Technician Code

The Cabinet Lock is supplied with two factory set codes:

Master Code: 11 33 55 77

User Code: 22 44

- When fitted immediately change the Master Code and User Code.
- All Master Codes and Sub-Master Codes are 8 digits long – 100,000,000 code permutations.
- All User Codes are 4 digits long – 10,000 possible code permutations.
- The lock 'open' time is set at 4 seconds.

FUNCTIONS

Before programming select the most appropriate function for the application.



A) Repeat code mode

Important Note: This is the default function and is already pre-programmed in new locks. This is the most common function and is used where the same code will be repeatedly used.

B) Single use code mode (locker mode)

The User enters a single use code which will lock and then open the lock once only and then be erased. This function is used for short term, multi occupancy applications e.g. a locker in leisure centre.

The lock will now remain open until the next single use code is entered into the lock.

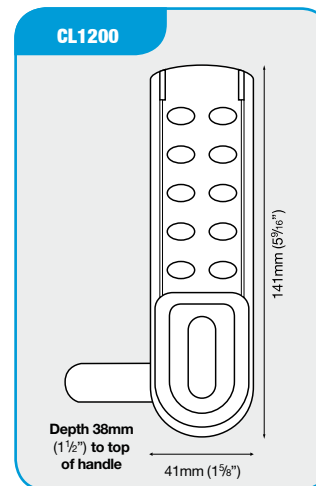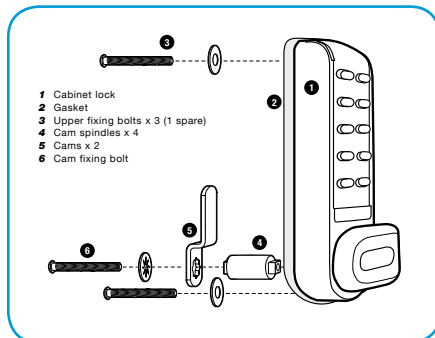

OPERATING INSTRUCTIONS

Note: The Cabinet Lock has a 10 button keypad and a **CODELOCKS.COM** button. This is used when programming and is found behind the handle.

The same code cannot be programmed into more than one level.

The lock has the following code levels:

Master Code can:

Open the lock
Change the Master Code
Set / Change / Delete the Sub-Master, User and Technician Code
Select between repeated use and single use codes
Restrict the lock time

Sub-Master Code can:

Open the lock
Change the Sub-Master
Set / Change / Delete the User Code

User Code can:

Open the lock
Change the User Code

Technician Code can:

Open the lock without erasing User Code



Colour Options Available Contact Codelocks



Codelocks CL2000 Range

Technical Specifications

Door thickness 35mm - 65mm (1³/₈" - 2¹/₂")

Spindle type Flat bar spindle

Non handed Lock will fit doors hung on the left or right

Latch

Light duty with stainless steel latchbolt head, with "anti-shim" plunger, 60mm (2³/₈") backset requires 25mm (1") hole, 82mm (3¹/₄") deep.

Also available to order:

50mm (2") backset latch requiring 25 x 72mm (1" x 2⁷/₈") hole or

70mm (2³/₄") backset latch requiring 25 x 92mm (1" x 3⁵/₁₆") hole.

Spindle adaptor

Lock is supplied with an 8mm spindle adaptor allowing it to be used with existing 8mm (5/₁₆") square follower latches.

Body material Zinc alloy

Buttons Individual, stainless steel

Operations 80,000

Low battery warning

Red LED will flash on opening to indicate batteries need to be changed.

Finishes available

PVD (Physical Vapour Deposition) hardwearing low maintenance finishes BS (brushed steel) and PB (polished brass).



REM 1 Lock fitted as standard with remote release (REM1) terminal. This can be used to open the lock via remote wired switch (not supplied).

REM 2 Lock fitted as standard with remote alarm release (REM2) terminal. This can be used when linked to an alarm system to activate (via maintained or momentary contact) the lock to the open state for 30 minutes.

Codes

- Codes may be 4, 5 or 6 digits long. Providing a possible 1,110,000 code combinations.
- The lock memory will store 80 different User Codes.
- The lock memory can store 10 different one-time User Codes.

Code Free Code free mode can be set via the keypad.


Key override As standard the lock has a key override function.

Keying alike Locks can be supplied as keyed alike on request.

Battery override Should batteries fail and key is misplaced lock can be opened by attaching a PP3 battery to contact points and entering the Master code.


Batteries 2 x 1.5 v AA Cells.

For internal and external use

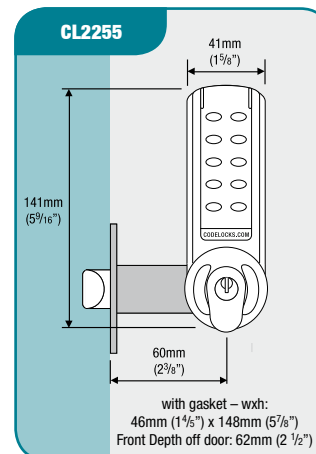

CL2255 Tubular Mortise Latch

Outside knob will not turn unless a valid code is entered. Spring latch will automatically lock the door when closed.



CL2200 Surface Deadbolt

Bolt slides on inside surface of door to lock or unlock. Bolt is moved manually by means of the outside knob after code input and freely by the inside knob at all times. A surface mounted keep is provided. Brushed Steel finish only.

CL2210 Mortice Deadbolt NOT ILLUSTRATED

Sizes as CL2255. Bolt extends 25mm (1") beyond door edge when locked.

CODELOCK
2000
ELECTRONIC



Programming Options

- | | | |
|------------------------------------|-----------------------------------|---|
| 01 - Enter new User Code | 06 - Set unlock time | 11 - Cancel emergency open |
| 02 - Suspend User Code | 07 - One-time User Codes | 12 - Delete all User Codes |
| 03 - Restore User Code | 08 - Set Code Free mode | 13 - Set or change Sub-Master Code |
| 04 - Suspend all User Codes | 09 - Cancel Code Free mode | 14 - Delete Sub-Master Code |
| 05 - Restore all User Codes | 10 - Change Master Code | 15 - LED locked / unlocked status |

Codelocks CL4000 Range

Technical Specifications

Door thickness 35mm - 65mm (1 3/8" - 2 1/2")

Spindle type 8mm (5/16") spring loaded spindle

Body material Zinc alloy

Non handed Lock will fit doors hung on the left or right

Mortice Latch (CL4010)

Medium duty, stainless steel latchbolt head with "anti" shim deadlocking plunger, 8mm (5/16") follower.

60mm (2 3/8") backset, requires 25mm (1") hole, 82mm (3 1/4") deep.

70mm (2 3/4") backset, requires 25mm (1") hole, 92mm (3 5/16") deep.

Mortice Lock (CL4020)

Euro profile mortice sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The key can be used to open doors for management functions such as security and cleaning. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown.

Keypad 2 x 5

Buttons Individual, stainless steel.

Operations 200,000

Low battery warning

Red LED will flash on opening to indicate batteries need to be changed.

Finishes available

PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (polished brass).



REM 1 Lock fitted as standard with remote release (REM1) terminal. This can be used to open the lock via remote wired switch (not supplied).

REM 2 Lock fitted as standard with remote alarm release (REM2) terminal. This can be used when linked to an alarm system to activate the lock to the open state for 30 minutes.

Codes

- Codes may be 4, 5 or 6 digits long. Providing a possible 1,110,000 code combinations.

- The lock memory will store 80 different User Codes.

- The lock memory can store 10 different one-time User Codes.

Code Free mode can be set electronically at the keypad or mechanically by means of the override key.

Key override As standard the lock has a key override function.

Keying alike Locks can be supplied as keyed alike on request.

Master Key Please contact Codelocks for options.


Key cylinder change From lock front (5 pin).

Storeroom function Locks fitted with storeroom function tailpiece as standard. i.e. latch can be retracted by key when turned.

Classroom function Classroom function tailpiece supplied to allow (when fitted) lock to be left in Code Free mode when key is removed.


Batteries 4 x AA Cells.

For internal and external use

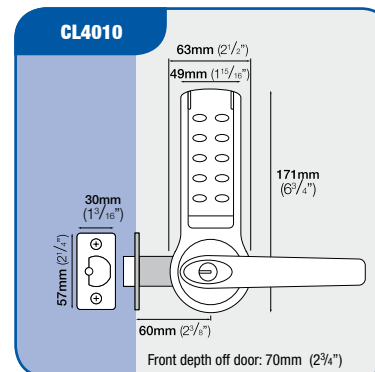

CL4010 Mortice Latch

Outside lever turns freely without operating the latchbolt. When valid code is entered and blue light burns, the lever will retract the latchbolt. When the door closes the spring latch will automatically lock the door. The key will open the door for management functions. The key may be used to set the lock into Code Free mode so that anyone can open the door without using a code (classroom function). Code Free mode can also be programmed at the keypad using the Master Code.

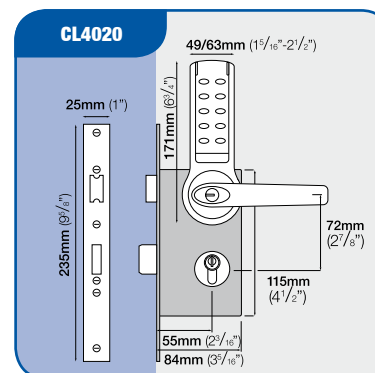

CL4020 Full Mortice Lock with Safety Feature

Outside lever and key functions as CL4010. Lockcase key retracts latchbolt for entry without using a code. Key controls the deadbolt position. When deadbolt is projected it denies access by code. When deadbolt is projected the safety feature allows the inside lever handle to retract the deadbolt and the latchbolt, preventing people being accidentally locked in.

CODELOCK
4000
ELECTRONIC



Programming Options

- | | | |
|------------------------------------|-----------------------------------|---|
| 01 - Enter new User Code | 06 - Set unlock time | 11 - Cancel emergency open |
| 02 - Suspend User Code | 07 - One-time User Codes | 12 - Delete all User Codes |
| 03 - Restore User Code | 08 - Set Code Free mode | 13 - Set or change Sub-Master Code |
| 04 - Suspend all User Codes | 09 - Cancel Code Free mode | 14 - Delete Sub-Master Code |
| 05 - Restore all User Codes | 10 - Change Master Code | 15 - LED locked / unlocked status |

Code locks CL4000GD Range

Technical Specifications

Door thickness 8mm - 15mm ($\frac{5}{16}$ " - $\frac{10}{16}$ ")

Spindle type 8mm ($\frac{5}{16}$ ") spring loaded spindle

Body material Zinc alloy

Handed Lever handle supplied as either right hand (RH) or left hand (LH) versions, inswing doors only.

Latch (CL4000GD)

Medium duty, stainless steel latchbolt head with 8mm ($\frac{5}{16}$ ") follower.

Keypad 2 x 5

Buttons Individual, stainless steel

Operations 140,000

Low battery warning

Red LED will flash on opening to indicate batteries need to be changed.

Finishes available

PVD (Physical Vapour Deposition) hardwearing low maintenance finish BS (brushed steel).



Codes

- Codes may be 4, 5 or 6 digits long. Providing a possible 1,110,000 code combinations.
- The lock memory will store 80 different User Codes.
- The lock memory can store 10 different one-time User Codes.

Code Free mode can be set electronically at the keypad or mechanically by means of the override key.

Key override As standard the lock has a key override function.

Keying alike Locks can be supplied as keyed alike on request.


Key cylinder change From lock front (5 pin).

Storeroom function Locks fitted with storeroom function tailpiece as standard. i.e. latch can be retracted by key when turned.

Classroom function Classroom function tailpiece supplied to allow (when fitted) lock to be left in code free mode when key is removed.


Batteries 4 x 'N' Cells.

For internal use

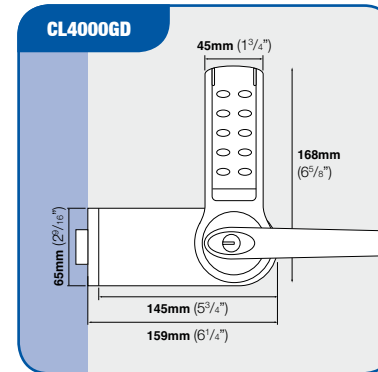


CL4000GD Electronic patch door lock

Outside lever turns freely without operating the latchbolt. When valid code is entered and blue light burns, the lever will retract the latchbolt. When the door closes the spring latch will automatically lock the door. The key will open the door for management functions. The key may be used to set the lock into Code Free mode so that anyone can open the door without using a code (classroom function). Code Free mode can also be programmed at the keypad using the Master Code.

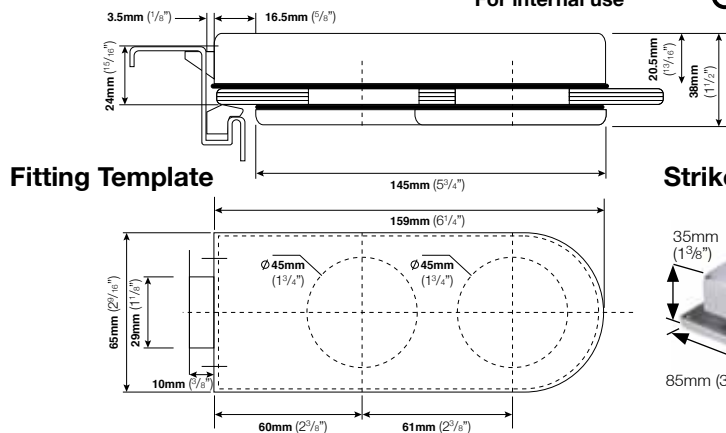

Strike Box (Sold Separately)



Programming Options

- | | | |
|------------------------------------|-----------------------------------|---|
| 01 - Enter new User Code | 06 - Set unlock time | 11 - Cancel emergency open |
| 02 - Suspend User Code | 07 - One-time User Codes | 12 - Delete all User Codes |
| 03 - Restore User Code | 08 - Set Code Free mode | 13 - Set or change Sub-Master Code |
| 04 - Suspend all User Codes | 09 - Cancel Code Free mode | 14 - Delete Sub-Master Code |
| 05 - Restore all User Codes | 10 - Change Master Code | 15 - LED locked / unlocked status |



Codelocks CL5000 Range

Technical Specifications



Door thickness	35mm - 65mm (1 ³ / ₈ " - 2 ¹ / ₂ ")
Spindle type	8mm (5/16") spring loaded spindle
Body material	Zinc alloy
Non handed	Lock will fit doors hung on the left or right
Tested to	Grade 2 ANSI A156.2 / A156.25 UL/ULC Fire Rating 3 hours (When fitted with fire kit)

Mortice Latch (CL5010)

Medium duty, stainless steel latchbolt head with "anti" shim deadlocking plunger, 8mm (5/16") follower.

60mm (2³/₈") backset, requires 25mm (1") hole, 82mm (3¹/₄") deep.

70mm (2³/₄") backset, requires 25mm (1") hole, 92mm (3⁵/₁₆") deep.

Mortice Lock (CL5020)

Euro profile mortice sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The key can be used to open doors for management functions such as security and cleaning. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown.

Keypad 3 x 4

Buttons Individual, stainless steel

Operations 200,000

Low battery warning

Red LED will flash on opening to indicate batteries need to be changed.

Finishes available

PVD (Physical Vapour Deposition) hardware low maintenance finishes BS (brushed steel) and PB (polished brass).

REM 1 Lock fitted as standard with remote release (REM1) terminal. This can be used to open the lock via remote wired switch (not supplied).

REM 2 Lock fitted as standard with remote alarm release (REM2) terminal. This can be used when linked to an alarm system to activate the lock to the open state for 30 minutes.

Codes

- Codes may be 4, 5 or 6 digits long. Providing a possible 1,110,000 code combinations.
- The lock memory will store 80 different User Codes.
- The lock memory can store 10 different one-time User Codes.

Code Free mode can be set electronically at the keypad or mechanically by means of the override key.

Key override As standard the lock has a key override function.

Keying alike Locks can be supplied as keyed alike on request.

Master Key Please contact Codelocks for options.


Key cylinder change From lock front (6 pin).

Storeroom function Locks fitted with storeroom function tailpiece as standard. ie latch can be retracted by key when turned.

Classroom function Classroom function tailpiece supplied to allow (when fitted) lock to be left in code free mode when key is removed.

Batteries 4 x AA Cells.

For internal and external use




CL5010 Mortice Latch

Outside lever turns freely without operating the latchbolt. When valid code is entered and blue light burns, the lever will retract the latchbolt. When the door closes the spring latch will automatically lock the door. The key will open the door for management functions. The key may be used to set the lock into Code Free mode so that anyone can open the door without using a code (classroom function). Code Free mode can also be programmed at the keypad using the Master Code.

CL5010BB Back to Back (for internal use only)

CL5000 locks may be ordered with 2 keypad plates for installation on both sides of the door to provide code access in both directions.





CL5020 Full Mortice Lock with Safety Feature

Outside lever and key functions as CL5010. Lockcase key retracts latchbolt for entry without using a code. Key controls the deadbolt position. When deadbolt is projected it denies access by code. When deadbolt is projected the safety feature allows the inside lever handle to retract the deadbolt and the latchbolt, preventing people being accidentally locked in.

CL5000PK Panic Kit

Suitable for use with a wide range of Single Point Exit Panic Devices.

Please contact Codelocks for compatible units.



Programming Options

01 - Enter new User Code	06 - Set unlock time	11 - Cancel emergency open
02 - Suspend User Code	07 - One-time User Codes	12 - Delete all User Codes
03 - Restore User Code	08 - Set Code Free mode	13 - Set or change Sub-Master Code
04 - Suspend all User Codes	09 - Cancel Code Free mode	14 - Delete Sub-Master Code
05 - Restore all User Codes	10 - Change Master Code	15 - LED locked / unlocked status

Code locks CL100 Range

Technical Specifications

Door thickness 35mm - 65mm (1³/₈" - 2¹/₂")

Spindle type Flat spring loaded spindle

Body material Zinc alloy

Non handed Lock will fit doors hung on the left or right

Latch

Light duty with stainless steel latchbolt head, with "anti-shim" plunger, 60mm (2³/₈") backset requires 25mm (1") hole, 82mm (3¹/₄") deep.

Also available to order:

50mm (2") backset latch requiring 25 x 72mm (1" x 2⁷/₈") hole or

70mm (2³/₄") backset latch requiring 25 x 92mm (1" x 3⁵/₁₆") hole.

Codes

8,191 non sequential codes available

Code storage

Single code

Code change method

Requires removal of lock from door


Neoprene seals are included on both sides to provide friction against the face of the door and to avoid damage from overtightening of the fixing bolts.

Finishes available


Silver Grey or Polished Brass



For internal and external use

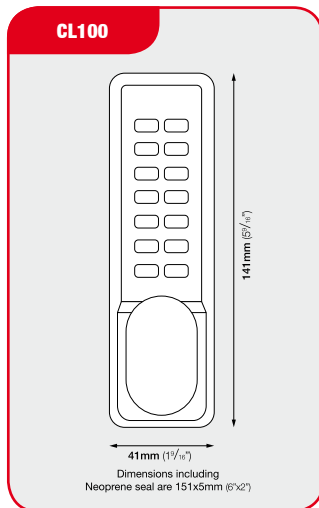


Code front common to all models




CL100 Surface Deadbolt

Bolt slides on inside of the door, to lock or unlock. Bolt is moved manually by means of the outside knob after code input and freely by the inside knob at all times. A surface mounted and mortice keep are provided. Silver Grey finish only.



CL155 Mortice Latch

As standard supplied with 'Hold open' function allowing free entry when required without operating the code. Function can be disabled on installation requiring code to be entered every time to open door.



CL190 Back to Back

The CL190 Back to Back mortice latch is supplied with two code plates to provide coded access in both directions.

CODELOCK
100
MECHANICAL



Codelocks CL200 Range

Technical Specifications

Door thickness 35mm - 65mm (1³/₈" - 2¹/₂")

Spindle type Flat spring loaded spindle

Body material Zinc alloy

Non handed Lock will fit doors hung on the left or right

Latch

Light duty with stainless steel latchbolt head, with "anti-shim" plunger, 60mm (2³/₈") backset requires 25mm (1") hole, 82mm (3¹/₄") deep.

Also available to order:

50mm (2") backset latch requiring 25 x 72mm (1" x 2⁷/₈") hole or

70mm (2³/₄") backset latch requiring 25 x 92mm (1" x 3⁵/₁₆") hole.

Codes

8,191 non sequential codes available

Code storage

Single code

Code change method

Requires removal of lock from door


Neoprene seals are included on both sides to provide friction against the face of the door and to avoid damage from overtightening of the fixing bolts.

Finishes available

PVD (Physical Vapour Deposition) hard wearing low maintenance finishes SS (stainless steel) and PB (polished brass).




For internal and external use

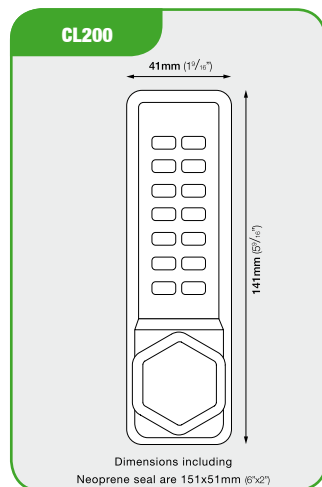

Code front common to all models


CL210 Mortice Deadbolt NOT ILLUSTRATED

Sizes as CL255. Bolt extends 25mm (1") beyond door edge when locked.




CL200 Surface Deadbolt

Bolt slides on inside surface of door to lock or unlock. Bolt is moved manually by means of the outside knob after code input and freely by the inside knob at all times. A surface mounted keep is provided. Stainless Steel finish only.



CL255 Mortice Latch

As standard supplied with 'Hold open' function allowing free entry when required without operating the code. Function can be disabled on installation requiring code to be entered every time to open door.



CL290 Back to Back

The CL290 Back to Back mortice latch is supplied with two code plates to provide coded access in both directions.



Key Override

Any of the CL200 functions may be ordered with key override. Locks may be keyed alike if required. Stainless Steel finish only.

Cylinders may be ordered keyed alike on request.



Codelocks CL400 Range

Technical Specifications

Door thickness 35mm - 65mm (1³/₈" - 2¹/₂")

Spindle type 2 part 8mm (5/16") spring loaded spindle

Body material Zinc alloy

Non handed Lock will fit doors hung on the left or right

Mortise Latch (CL410 & CL415)

Medium duty, stainless steel latchbolt head with "anti" shim deadlocking plunger, 8mm (5/16") follower.

60mm (2³/₈") backset, requires 25mm (1") hole, 82mm (3¹/₄") deep.

70mm (2³/₄") backset, requires 25mm (1") hole, 92mm (3⁵/₁₆") deep.

Mortise Lock (CL420 & CL425)

Euro profile mortise sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The key can be used to open doors for management functions such as security and cleaning. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown. Supplied with double euro profile cylinders with three keys. May be ordered keyed alike.

Code Free access option via keypad on models CL405, CL415 & CL425.

Codes

8,191 non sequential codes available

Code storage

Single code

Code change method

Requires removal of lock from door


Finishes available

PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (polished brass).



For internal and external use

Neoprene seals are included on both sides to provide friction against the face of the door and to prevent damage from over tightening of the fixing bolts. The outside lever handle has a slipping clutch to prevent damage to the lock if the handle is forced.



CL410 Mortise Latch

Outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed.

CL415 Mortise Latch

As CL410 with Code Free access option on keypad. In Code Free mode the outside lever will retract the latchbolt without using a code.

CL400 Front & backplates only

NOT ILLUSTRATED

For use with existing lock or latch.


CL405 Front & backplates only

NOT ILLUSTRATED

With Code Free access, for use with existing lock or latch.

NB 1: For CL400 & CL405 existing lock must have 22mm (7/8") fixing hole below follower (spindle).

NB 2: See note page 65



CL420 Full Mortise Lock with Safety Feature

Outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed. Key retracts latchbolt for entry without using a code. Key controls deadbolt position. When deadbolt is projected it denies access by code. When deadbolt is projected the safety feature allows the inside lever handle to retract the deadbolt and the latchbolt, preventing people being accidentally locked in.

CL425 Full Mortise Lock with Safety Feature

As CL420 with Code Free access function on the keypad. In Code Free mode the outside lever will retract the latchbolt without using a code.

Back to Back

NOT ILLUSTRATED The CL410 (Mortise Latch) may be ordered with two keypad plates for installation on both sides of the door to provide coded access in both directions. Stainless Steel finish only.

CODELOCK
400
MECHANICAL



Codelocks CL0460 Range

Technical Specifications

Suitable for use with aluminium doors.
Designed to be retrofitted to Adams Rite or similar style ANSI round cylinder mortice deadlatches (not supplied).

Body material Zinc alloy

Non handed Lock will fit doors hung on the left or right

Codes 8,191 non sequential codes available

Code storage Single code

Key override As standard the lock has a key override function

Keying alike Locks can be keyed alike on request

Mortice Latch 38mm (1½") and 29mm (1⅛")
Backset Latches available on request, contact Codelocks - (Sold Separately)

Finishes available



PVD (Physical Vapour Deposition)
hardwearing low maintenance finish
SS (stainless steel).



For internal and external use

Codes: All our mechanical locks are supplied with a random code commencing with the 'C' clear button. To change the code after fitting, the lock must first be removed from the door.

The code is non sequential, that is the code can be entered in any order e.g. 1234 can be 4321 or 1342 or whatever is the most convenient sequence. With the 13 buttons a total of 8,191 different codes are available, any of which may be entered in any order.

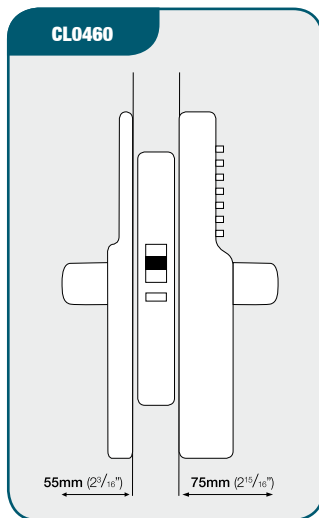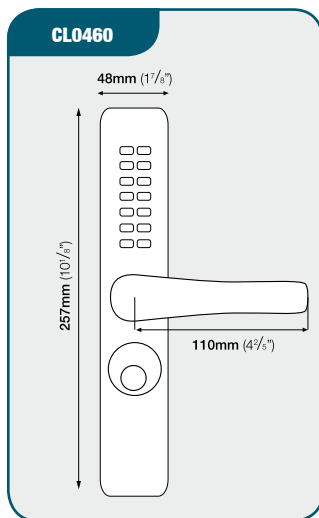

CL0460L

Narrow stile Code lock complete with cams and threaded cylinder and lever handles.

CL0465L

Narrow stile Code lock complete with Code Free function, cams and threaded cylinder and lever handles.

CL0470L

Narrow stile Code lock complete with cams and euro profile cylinder and lever handles.

CL0475L

Narrow stile Code lock complete with Code Free function, cams and euro profile cylinder and lever handles.

L = Lever handle supplied as standard

B = Ball shape knob option available for each product

CODELOCK
0460
MECHANICAL



CodeLocks CL500 Range

Technical Specifications

Door thickness 35mm - 65mm (1³/₈" - 2¹/₂")

Spindle type 2 part 8mm (5/16") spring loaded spindle

Body material Zinc alloy

Non handed Lock will fit doors hung on the left or right

Mortice Latch (CL510 & CL515)

Medium duty, stainless steel latchbolt head with "anti" shim deadlocking plunger, 8mm (5/16") follower.

60mm (2³/₈") backset, requires 25mm (1") hole, 82mm (3¹/₄") deep.

70mm (2³/₄") backset, requires 25mm (1") hole, 92mm (3⁵/₁₆") deep.

Mortice Lock (CL520 & CL525)

Euro profile mortice sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The key can be used to open doors for management functions such as security and cleaning. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown. Supplied with double euro profile cylinders with three keys. May be ordered keyed alike.

Code Free access option via keypad on models CL505, CL515 & CL525.

Codes

8,191 non sequential codes available

Code storage

Single code

Code change method

Requires removal of lock from door


Finishes available

PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (polished brass).



For internal and external use

Neoprene seals are included on both sides to provide friction against the face of the door and to prevent damage from over tightening of the fixing bolts. The outside lever handle has a slipping clutch to prevent damage to the lock if the handle is forced.



CL510 Mortice Latch

Outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed.

CL515 Mortice Latch

As CL510 with Code Free access option on keypad. In Code Free mode the outside lever will retract the latchbolt without using a code.

CL500 & CL505 Front & backplates only

NOT ILLUSTRATED

For use with existing lock or latch.

NB 1: For CL500 & CL505 existing lock must have either a fixing hole (22mm 7/8") below follower (spindle) or two horizontal holes either side of the follower (38mm 1 1/2" centres)


NB 2: See note page 65

CL500PK Panic Device Access Kit

NOT ILLUSTRATED

Keypad plate only, supplied with an extra long spindle to work with most exit devices with 8mm (5/16") square followers.

Stainless Steel finish only.



CL520 Full Mortice Lock with Safety Feature

Outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed. Key retracts latchbolt for entry without using a code. Key controls deadbolt position. When deadbolt is projected it denies access by code. When deadbolt is projected the safety feature allows the inside lever handle to retract the deadbolt and the latchbolt, preventing people being accidentally locked in.

CL525 Full Mortice Lock with Safety Feature

As CL520 with Code Free access function on the keypad. In Code Free mode the outside lever will retract the latchbolt without using a code.

Back to Back

NOT ILLUSTRATED

The CL500 and the CL510/CL515 (Mortice Latch) may be ordered with two keypad plates for installation on both sides of the door to provide coded access in both directions. Stainless Steel finish only.

CODELOCK
500
MECHANICAL



Code locks CL600 Range

Technical Specifications



Door thickness 35mm - 65mm (1 3/8" - 2 1/2")

Spindle type 2 part 8mm (5/16") spring loaded spindle

Body material Zinc alloy

Non handed Lock will fit doors hung on the left or right

Tested to Grade 2 ANSI A156.2
UL/ULC Fire Rating 3 hours
(When fitted with fire kit)

Mortice Latch (CL610 & CL615)

Medium duty, stainless steel latchbolt head with "anti" shim deadlocking plunger, 8mm (5/16") follower.

60mm (2 3/8") backset, requires 25mm (1") hole, 82mm (3 1/4") deep.

70mm (2 3/4") backset, requires 25mm (1") hole, 92mm (3 5/8") deep.

Mortice Lock (CL620 & CL625)

Euro profile mortice sash lock with deadbolt and latchbolt. Complete with double cylinder to control deadbolt and to retract latchbolt. With the deadbolt locked it denies access to a code user. The key can be used to open doors for management functions such as security and cleaning. The split follower enables the inside lever to retract the deadbolt and latch to prevent accidental lock in when the deadbolt is thrown. Supplied with double euro profile cylinders with three keys. May be ordered keyed alike.

Code Free access option via keypad on models CL605, CL615 & CL625.

Codes

8,191 non sequential codes available

Code storage

Single code

Code change method

On door via key
How to Quick Code see page 32



Key override As standard the lock has a key override function

Finishes available

PVD (Physical Vapour Deposition) hardware low maintenance finishes BS (brushed steel) and PB (polished brass).




For internal and external use

Keying alike Locks can be supplied as keyed alike on request.

Key cylinder change From lock front (6 pin).

Neoprene seals are included on both sides to provide friction against the face of the door and to prevent damage from over tightening of the fixing bolts. The outside lever handle has a slipping clutch to prevent damage to the lock if the handle is forced.




CL610 Mortice Latch

Outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed.

CL615 Mortice Latch

As CL610 with Code Free access option on keypad. In Code Free mode the outside lever will retract the latchbolt without using a code.



CL600 & CL605 Front & backplates only

NOT ILLUSTRATED


For use with an existing lock or latch.

NB: For CL600 & CL605 existing lock must have either a fixing hole (22mm 7/8") below follower (spindle) or two horizontal holes either side of the follower (38mm 1 1/2" centres)

CL600PK Panic Device Access Kit

NOT ILLUSTRATED

Keypad plate only, supplied with an extra long spindle to work with most exit devices with 8mm (5/16") square followers. Brushed Steel finish only.



CL620 Full Mortice Lock with Safety Feature

Outside lever handle will retract the latch after a correct code is entered. The spring loaded latchbolt will lock automatically when the door is closed. Key retracts latchbolt for entry without using a code. Key controls deadbolt position. When deadbolt is projected it denies access by code. When deadbolt is projected the safety feature allows the inside lever handle to retract the deadbolt and the latchbolt, preventing people being accidentally locked in.

CL625 Full Mortice Lock with Safety Feature

As CL620 with Code Free access function on the keypad. In Code Free mode the outside lever will retract the latchbolt without using a code.

Back to Back

NOT ILLUSTRATED

The CL600 and the CL610/CL615 (Mortice Latch) may be ordered with two keypad plates for installation on both sides of the door to provide coded access in both directions. Brushed steel finish only.

**CODELOCK
600
MECHANICAL**





**CABINET
LOCK 1000
ELECTRONIC**



**CABINET
LOCK 1200
ELECTRONIC**



**CODELOCK
2000
ELECTRONIC**



**CODELOCK
4000
ELECTRONIC**



**CODELOCK
5000
ELECTRONIC**



**CODELOCK
100
MECHANICAL**



**CODELOCK
200
MECHANICAL**



**CODELOCK
400
MECHANICAL**



**CODELOCK
0460
MECHANICAL**



**CODELOCK
500
MECHANICAL**



**CODELOCK
600
MECHANICAL**



www.codelocks.com

Codelocks fully dedicated website offers technical information and support including information on code changing and installation. Spares for locks are also available, click on the spares page from the home page.

Download this brochure too!

Service & Spares

Codelocks will repair, service or replace any lock should a manufacturing fault develop. Simply call us, or email details of the problem and we will do the rest.



Helpline, Service & Spares

UK/Europe

Freephone: 0800 393405

Tel: +44 (0)1635 239645

Email: sales@codelocks.co.uk

Web: www.codelocks.com

Americas

Toll free: 1.877.codelock

Tel: +1 714 979 2900

Email: sales@codelock.us

Web: www.codelocks.us

Maintenance No maintenance of the working parts is necessary. Do not oil. To maintain the finish the lock should be cleaned regularly with a soft cloth. A silicone spray or similar should be used to provide a protective film against grit and grime.

Aftercare It is strongly recommended to undertake a regular maintenance schedule and wipe the outer surface of all Codelocks products fitted externally with a silicone based spray to help keep the products clean and encourage the displacement of water. DO NOT use oil based lubricants as these will attract dirt.

UK Headquarters



CODELOCKS LTD

Castle Industrial Park
Kiln Road Newbury
Berkshire RG14 2EZ
UNITED KINGDOM

Tel: +44 (0) 1635 239645
Fax: +44 (0) 1635 239644
sales@codelocks.co.uk
www.codelocks.com

CODELOCKS INC

2930-B College Avenue
Costa Mesa
CA 92626
USA

Tel: +1 714 979 2900
Fax: +1 714 979 2902
sales@codelocks.us
www.codelocks.us



www.codelocks.com



We are proud to be associated with The Guild of Architectural Ironmongers, the Master Locksmith Association, Associated Locksmiths of America, the Security Hardware Distributors Association, the Door and Hardware Institute and the Fitness Industry Association.



CODELOCKS

control + convenience

Disclaimer for using Codelocks mechanical or electronic digital locks with existing lock-cases:

When using Codelocks front and back plates only, please test with your lock-case to ensure that the latch retracts fully from the code side without too much resistance. Some lock-cases have a heavily sprung latch follower for use with un-sprung lever furniture. This heavy springing can defeat the clutch on our locks.

If in doubt do not specify one of our locks with a lock-case that is designed for use with un-sprung lever.

Also ensure that the code on the mechanical locks re-sets, or clears. The code chamber requires that the lever is rotated 45 degrees to re-set the lock for the next code-user.

Please contact our Codelocks Technical Department for further advice.

Codelocks Ltd does not accept responsibility for products incorrectly specified.

* All dimensions are nominal and subject to tolerances.

** Whilst every effort has been made to ensure the contents of this publication are accurate, no liability will be accepted by Codelocks Limited for any errors or omissions.



CODELOCKS

control + convenience

**CODELOCKS INC
2930-B COLLEGE AVENUE
COSTA MESA
CALIFORNIA 92626
USA**

**Tel +1 714 979 2900
Fax +1 714 979 2902
sales@codelocks.us**

www.codelocks.us

**CODELOCKS LTD
CASTLE INDUSTRIAL PARK
KILN ROAD NEWBURY
BERKSHIRE RG14 2EZ
UNITED KINGDOM**

**Tel +44 (0)1635 239645
Fax +44 (0)1635 239644
sales@codelocks.co.uk**

www.codelocks.com